
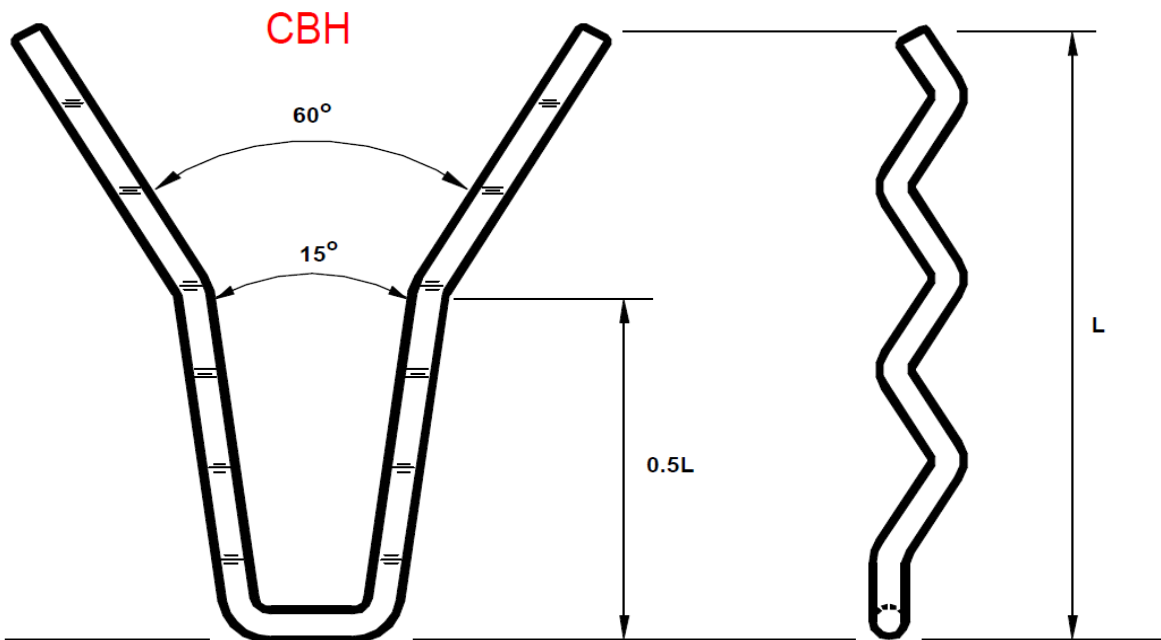


The Corrugated BULLHORN anchors

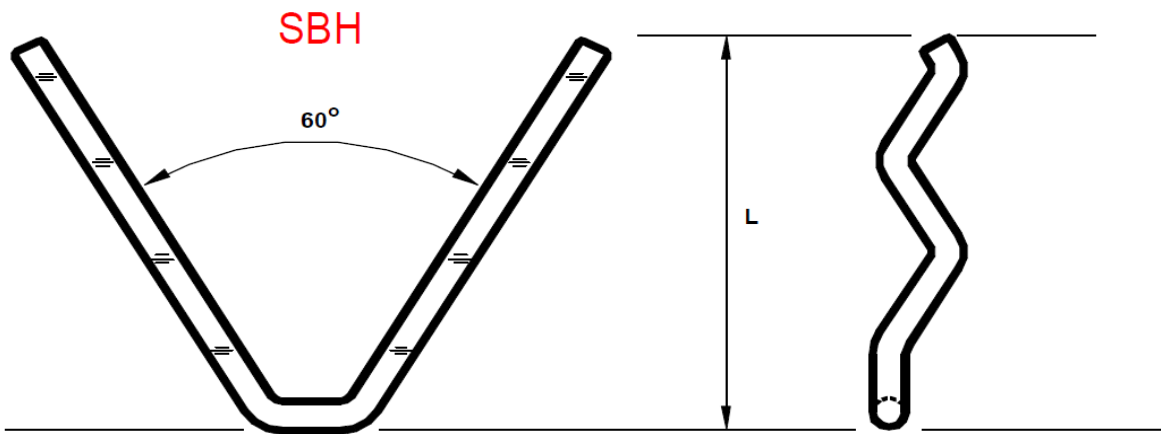

Commenced On : 17.1.2014

Drawn by: Tvikon s.r.o.

Product description: **Corrugated Bullhorn**

Tvikon

This drawing is the property of Tvikon s.r.o. Unauthorized use of patented features and / or and reproduction of this drawing is strictly prohibited.

Corrugated Bullhorn System


Tvikon s.r.o., U Landronky 1145/42, 169 00 Praha 6, Břevnov, tvikon@tvikon.cz, Phone: +420775908330

Dwg nr. T-14/42

The Corrugated BULLHORN anchors

Anchoring in the CBH and SBH Series are similar to those in the HB Series, but have been developed for thinner, heavy refractory concrete linings. These are securely anchored with the CBH and SBH Series due to pronounced corrugation. The retention forces are excellently transferred to the refractory concrete by the distinctive wave design with a standard angle of spread of 60°.

The anchors in the CBH and SBH Series are manufactured in the diameters 6 mm, 8 mm, 10 mm and 12 mm. The anchors with larger diameters, have been developed for installing with manual welding. For this purpose the anchor has a bar on the base which permits secure mounting.

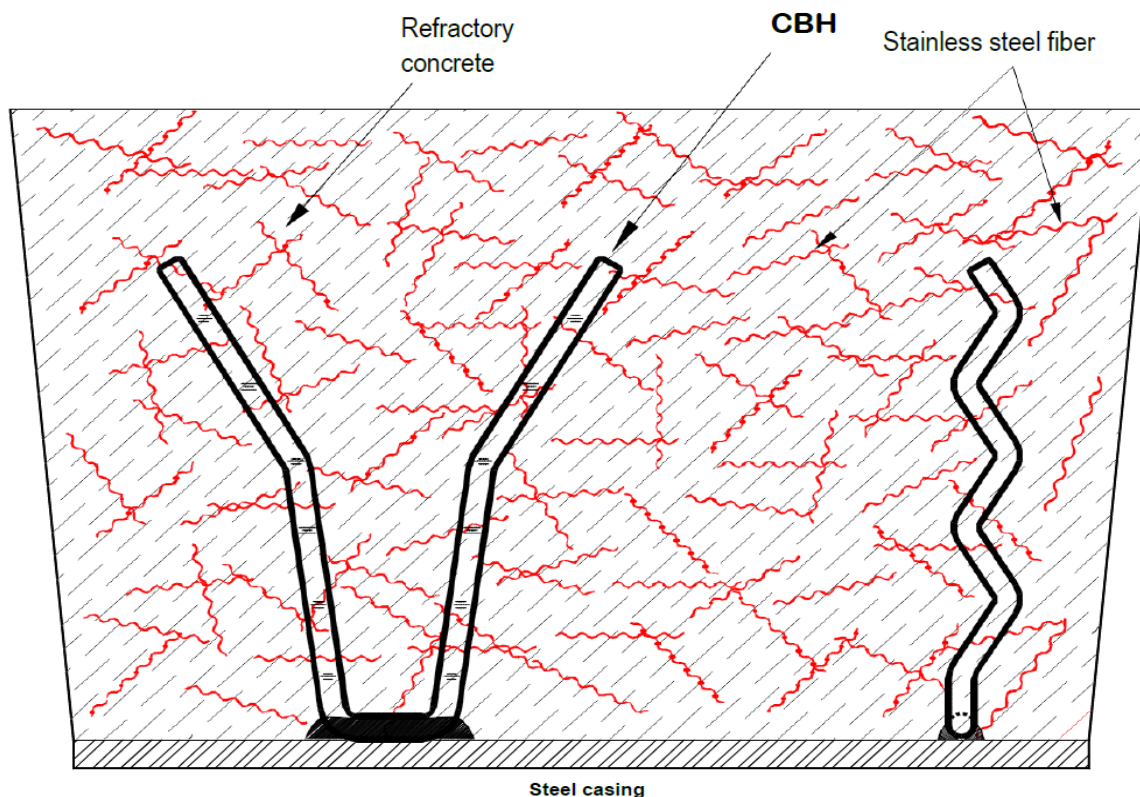**Tvikon**

Tvikon s.r.o., U Landronky 1145/42, 169 00 Praha 6, Břevnov, tvikon@tvikon.cz, Phone: +420775908330


This drawing is the property of Tvikon s.r.o. Unauthorized use of patented features and / or and reproduction of this drawing is strictly prohibited.

Corrugated Bullhorn System

Dwg nr. T-14/43

Ordering examples and standard alloys available	<h2 style="text-align: center;">CBH</h2> <p style="text-align: center;">D_{max} = 12 mm D_{min} = 6 mm</p> <p style="text-align: center;">L_{max} = 350 mm L_{min} = 80 mm</p>
<p style="text-align: center;">Example</p> <p style="text-align: center; font-size: 24px; font-weight: bold;">CBH. 8 - 350 - 310</p> <div style="display: flex; justify-content: space-around; align-items: center; margin-top: 10px;"> <div style="text-align: center;">↑</div> <div style="text-align: center;">↑</div> <div style="text-align: center;">↑</div> <div style="text-align: center;">↑</div> </div> <div style="display: flex; justify-content: space-around; margin-top: 5px;"> Anchor type Diameter Length L Alloy type </div>	

- D₆ - B = 20 mm
- D₈ - B = 25 mm
- D₁₀ - B = 35 mm
- D₁₂ - B = 50 mm

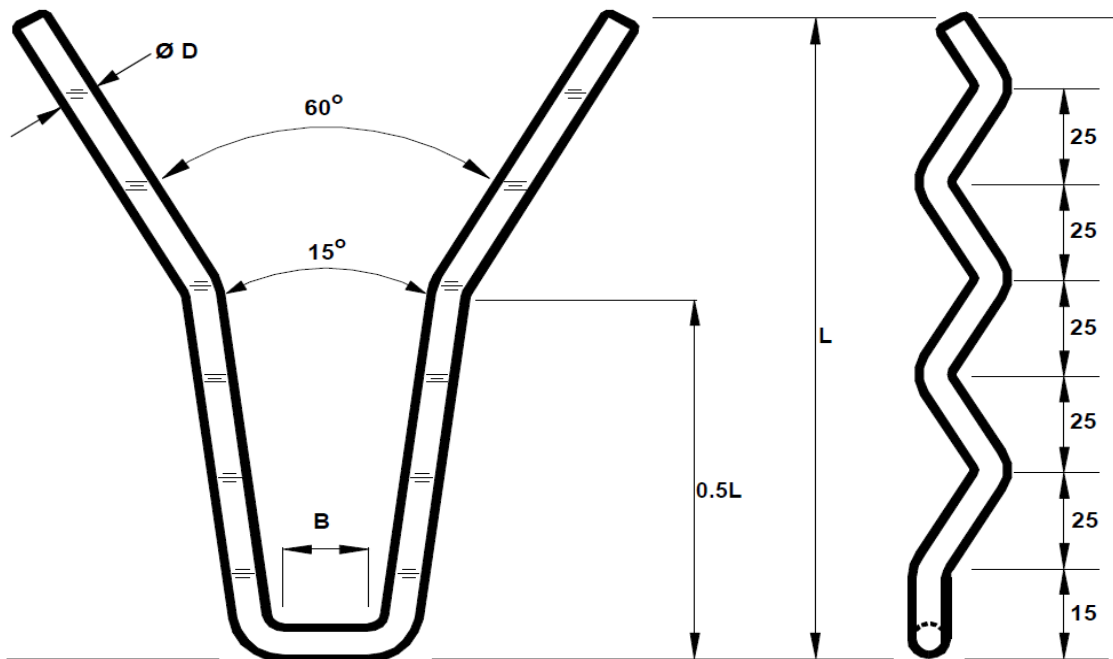

Tvikon	This drawing is the property of Tvikon s.r.o. Unauthorized use of patented features and / or and reproduction of this drawing is strictly prohibited.	Corrugated Bullhorn System
Tvikon s.r.o., U Landronky 1145/42, 169 00 Praha 6, Břevnov, tvikon@tvikon.cz, Phone: +420775908330		Dwg nr. T-14/44

Ordering examples and standard alloys available		<h1 style="margin: 0;">SBH</h1> <p style="margin: 10px 0;">D_{max} = 12 mm D_{min} = 6 mm</p> <p style="margin: 10px 0;">L_{max} = 350 mm L_{min} = 50 mm</p>
<p style="margin: 0;">Example</p> <p style="margin: 10px 0; font-size: 24px; font-weight: bold;">SBH. 6 - 150 - 310</p> <div style="display: flex; justify-content: space-around; align-items: center; margin: 5px 0;"> <div style="text-align: center;">↑</div> <div style="text-align: center;">↑</div> <div style="text-align: center;">↑</div> <div style="text-align: center;">↑</div> </div> <div style="display: flex; justify-content: space-around; margin: 0;"> Anchor type Diameter Length L Alloy type </div>		
<p>D₆ - B = 20 mm D₈ - B = 25 mm D₁₀ - B = 35 mm D₁₂ - B = 50 mm</p>		
<h2 style="margin: 0; color: red;">Tvikon</h2>		<p style="font-size: 10px;">This drawing is the property of Tvikon s.r.o. Unauthorized use of patented features and / or and reproduction of this drawing is strictly prohibited.</p>
Tvikon s.r.o., U Landronky 1145/42, 169 00 Praha 6, Břevnov, tvikon@tvikon.cz, Phone: +420775908330		<p style="margin: 0;">Corrugated Bullhorn System</p> <p style="margin: 0;">Dwg nr. T-14/45</p>